

EVERY THING YOU NEED TO KNOW ABOUT YOUR



XOU24WDZGOA
UNIVERSAL 2 ZONE WINE COOLER

I worked really hard
on this manual -
so please read it.





When buying any XO appliance
you can be confident you have chosen a
high quality, innovative and stylish product
from a company that cares about you!
If you require service or have questions,
Help is only a phone call away -
call: 973-403-8900
Talk to one of our undercounter experts.



CONGRATULATIONS

on purchasing your XO.
Before you proceed, take just
a moment to register your XO at:

www.xoappliance.com/register-your-product/

REGISTRATION HELPS YOU BY -

Ensuring warranty coverage should you need service
Providing ownership verification for insurance purposes
Let's XO notify you in the event of product changes or recalls.

WHERE THINGS ARE

Before You Get Started

4 - 7

Installer Checklist
Find Your Model
Safety Instructions
Electrical and Grounding Instructions

Installation Instructions

8 - 18

Sizes and Installation Dimensions
Reversing the Door Swing
Integrated Panel Dimensions
Optional Stainless Overlay Panel
Leveling Your XO

Operating Instructions

19 - 26

Product Overview
Control System Overview
Setting the Temperature
Functions
Wine and Beverage Storage
Storage Tips

Care and Cleaning

25 - 26

Helpful Hints
Cleaning the Interior / Exterior
Changing the Carbon Air Purification Filter

FAQ's

27 - 28

Before You Call For Service
Warranty

PLEASE READ AND FOLLOW
ALL SAFETY INSTRUCTIONS

It's for your
own good...
Honest.

DEAR INSTALLER

THE JOB ISN'T DONE UNTIL

To ensure that the installation process is successfully completed, here are few things to review...

- ☐ Is the unit plugged in?
- ☐ Are the controls on? (Panel will illuminate.)
- ☐ Are the controls operating correctly?
- ☐ Has the unit been properly leveled - both side to side and front to back - with all 4 leveling feet securely making contact with the floor?
- ☐ This is an OVERLAY unit - have the panels been securely attached and properly aligned?
- ☐ After installation, does the door open sufficiently to fully extend the shelves?
- ☐ Is the door sealing properly?
- ☐ Is the handle secure?
- ☐ Have you thoroughly inspected all surfaces for any imperfections?
- ☐ Have you reviewed this manual with the customer and explained the unit's operation and care?
- ☐ Has the customer received copies of the literature and keys?
- ☐ Have you properly disposed of all packing materials properly (recycle, please)?
- ☐ Is the customer satisfied?

DANGER

RISK OF CHILD ENTRAPMENT!


An empty refrigerator is a very dangerous attraction to children.

Remove door gaskets, latches, lids, lock and/or doors from unused or discarded appliances, or take other actions to guarantee them harmless.

Always dispose of old appliances in accordance with local laws and regulations.

THIS IS THE MODEL COVERED IN THIS BOOK

WINE COOLER

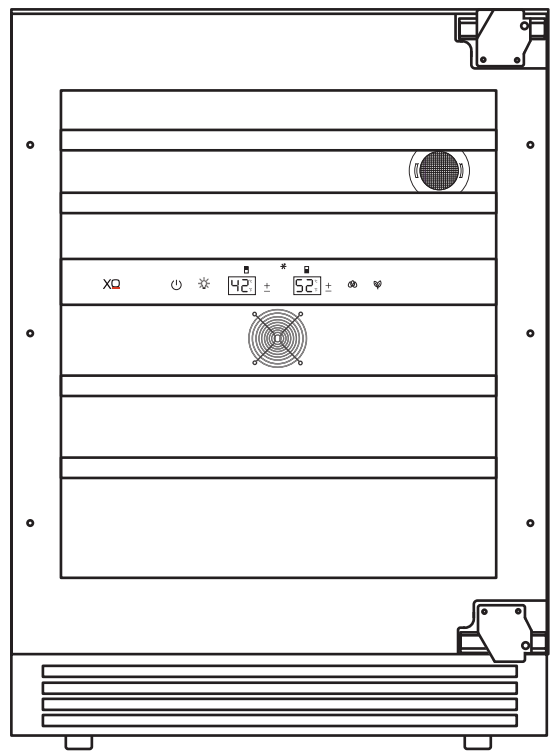

XOU24WDZGOA

ACCOMMODATES

EUROPEAN | ADA | AMERICAN STANDARD
CABINETRY

RECORD YOUR SERIAL NUMBER
HERE IN CASE YOU NEED IT LATER



YOUR SAFETY MATTERS

Please read through completely before using your XO Unit

To prevent damage to the door gasket, the door must be opened all the way before pulling racks out.

The appliance must be positioned so that the plug is accessible.

Empty your XO unit before attempting to move the appliance. Moving while loaded may damage or distort the frame.

The compressor will get HOT during operation / touching it may cause injury.

During installation follow all safety tips provided in this manual / appropriate safety equipment such as safety glasses and work gloves should be worn.

Two people should move or lift your XO unit to prevent injury or damage.

Remove all interior and exterior packing materials prior to installation and dispose of properly.

Never cover the bottle racks with foil or other material which will impede internal air circulation.

For maximum efficiency, keep the door tightly shut unless loading or unloading and never overload your XO unit.

Before installing, allow your XO unit to sit upright for 2 hours at the install site. This will allow the cooling system to stabilize after transportation. Failure to follow this step may cause problems.

Never store perishable food products such as meat or cheese in your wine cooler.

Location

Your XO unit should be located away from direct sunlight and heat sources (stove, heaters, etc.) which may increase electrical consumption. High or low ambient temperature may cause units to work improperly.

The floor must be strong enough to support your XO unit fully loaded.

Your XO unit must not be installed in areas of where water or excessive moisture are present.

Your XO unit must not be installed near where flammable, corrosive or hazardous materials are present.

Your XO unit's final installation must observe the correct minimum air clearances around and behind the unit to ensure adequate ventilation. In addition, all ventilation openings must be kept clear and free of obstructions, failure to do so will result in damage to the unit.

WARNING

NEVER use external heat sources to accelerate defrosting

NEVER permit unauthorized service or modifications to your XO unit

NEVER tamper with the sealed refrigerant system - this unit uses R600A Refrigerant which is flammable.

It should never be used in the vicinity of any flammable or explosive ignition sources.

ALWAYS FOLLOW THE ELECTRICAL SAFETY INSTRUCTIONS OUTLINED IN THIS MANUAL.

ELECTRICITY - THIS IS SERIOUS

Failure To Follow All Electrical Safety Measures May Result in Serious Injury, Fire Or Death

All electrical work should only be performed by an experienced, licensed electrician.

All XO units **MUST** be grounded for safe operation and come equipped with a 3 Prong molded cord/plug for that purpose.

NEVER remove or disable the 3rd prong with an adapter.



NEVER use an extension cord to operate your XO unit.



Your XO unit is built to operate on 115V 60Hz and should be plugged directly into a dedicated 15 amp 3 prong outlet. If you are uncertain as to the voltage, amperage capacity or if the 3rd prong is properly grounded - consult a licensed electrician.

To maximize the depth of the installation recess - your outlet should be mounted flush with the wall.

Your XO unit should not share the circuit with any other electrical devices as this may cause overloading, overheating, blown fuses or tripping circuit breakers. In a worst case this can pose a fire hazard.

NEVER handle your XO unit in wet conditions as this can pose a severe danger of electric shock.

Exercise care when moving your XO unit to avoid damage to the electrical cord. If the electrical cord of your XO unit becomes worn or damaged it must be replaced immediately by a qualified technician.

NEVER unplug your unit by pulling on the cord. Unplug by gripping the plug firmly and pull out straight from the outlet.

INDOOR USE ONLY:

XO Refrigerators, wine cellars and beverage centers described in this manual are rated for indoor use only.

Your XO Unit was designed to operate in a room temperature ambient condition between 60°F and 90°F.

Use in any area which is not temperature controlled within that range, such as a garage or porch may cause your XO unit to fail to function properly. Use in any uncontrolled area or otherwise exposed to the elements is hazardous and voids the warranty.

For outdoor installations - consult XO or your local XO dealer regarding an outdoor rated model.

In regions where high humidity exists condensation may appear on the glass and/or gasket seals. For best operation, keeping the unit fully stocked with product will reduce this.

SERVICE	115V - 60 Hz - 1 phase
AMPS	15 Amp Circuit Breaker
Requires a Dedicated Outlet	
GFI required for Outdoor Installations	
All electrical work must be performed by a licensed electrician	

State of California Proposition 65 Warning (US only) ⚠ WARNING


This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information go to www.P65Warnings.ca.gov

Serious injury, fire or death...
Okay -
You've got my attention!

XO

A PERFECT FIT

INSTALLATION UNDER COUNTER

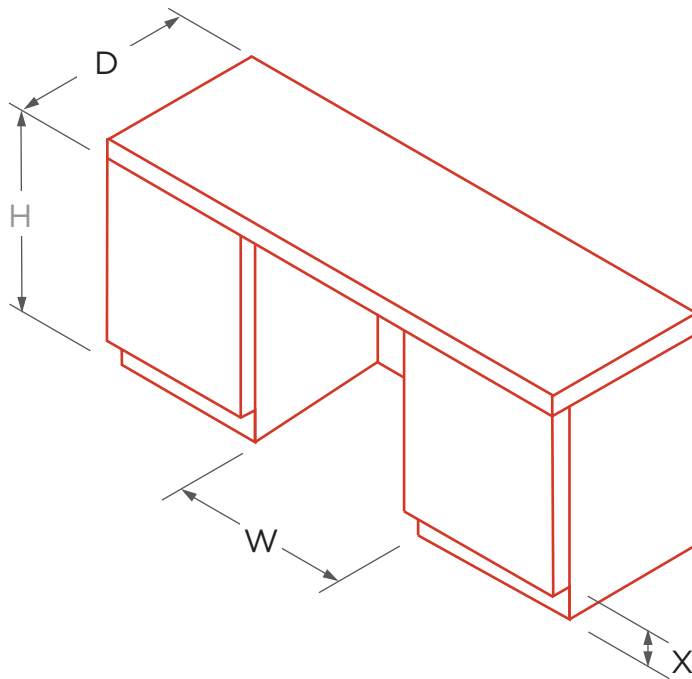

ALL XO UNDERCOUNTER
UNITS ARRIVE PRE-WIRED
WITH LOW PROFILE PLUGS
FOR EASY INSTALLATION




	CABINET DIMENSIONS		
	ADA	EUROPEAN	AMERICAN
HEIGHT (H) Minimum Maximum	32-1/2" (min)	825mm (min) 890mm (max)	34-1/2"
WIDTH (W)	24"	600mm	24"
DEPTH (D)*	24"*	600mm*	24"*
TOE KICK PLINTH (X)	4"	100mm (min) 150mm (max)	4" (min) 6" (max)

* Depth dimensions exclude counter top / base cabinet only

IF THE DOOR CAN'T OPEN FULLY - YOU CAN'T PULL THE SHELVES OUT.

If you need a little more space
when installing an overlay door unit,
you might use a recessed outlet or
cut the adjoining cabinet wall to
reach an outlet there...

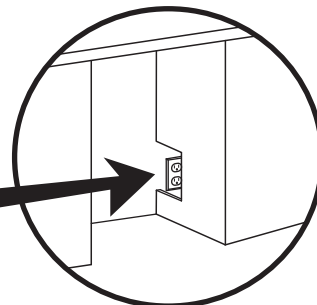


XO

A PERFECT FIT

YOUR XO IS THIS BIG (OR SMALL, AS THE CASE WOULD BE)

HEIGHT, WIDTH & DEPTH XOU24WDZGOA 24" WINE COOLER

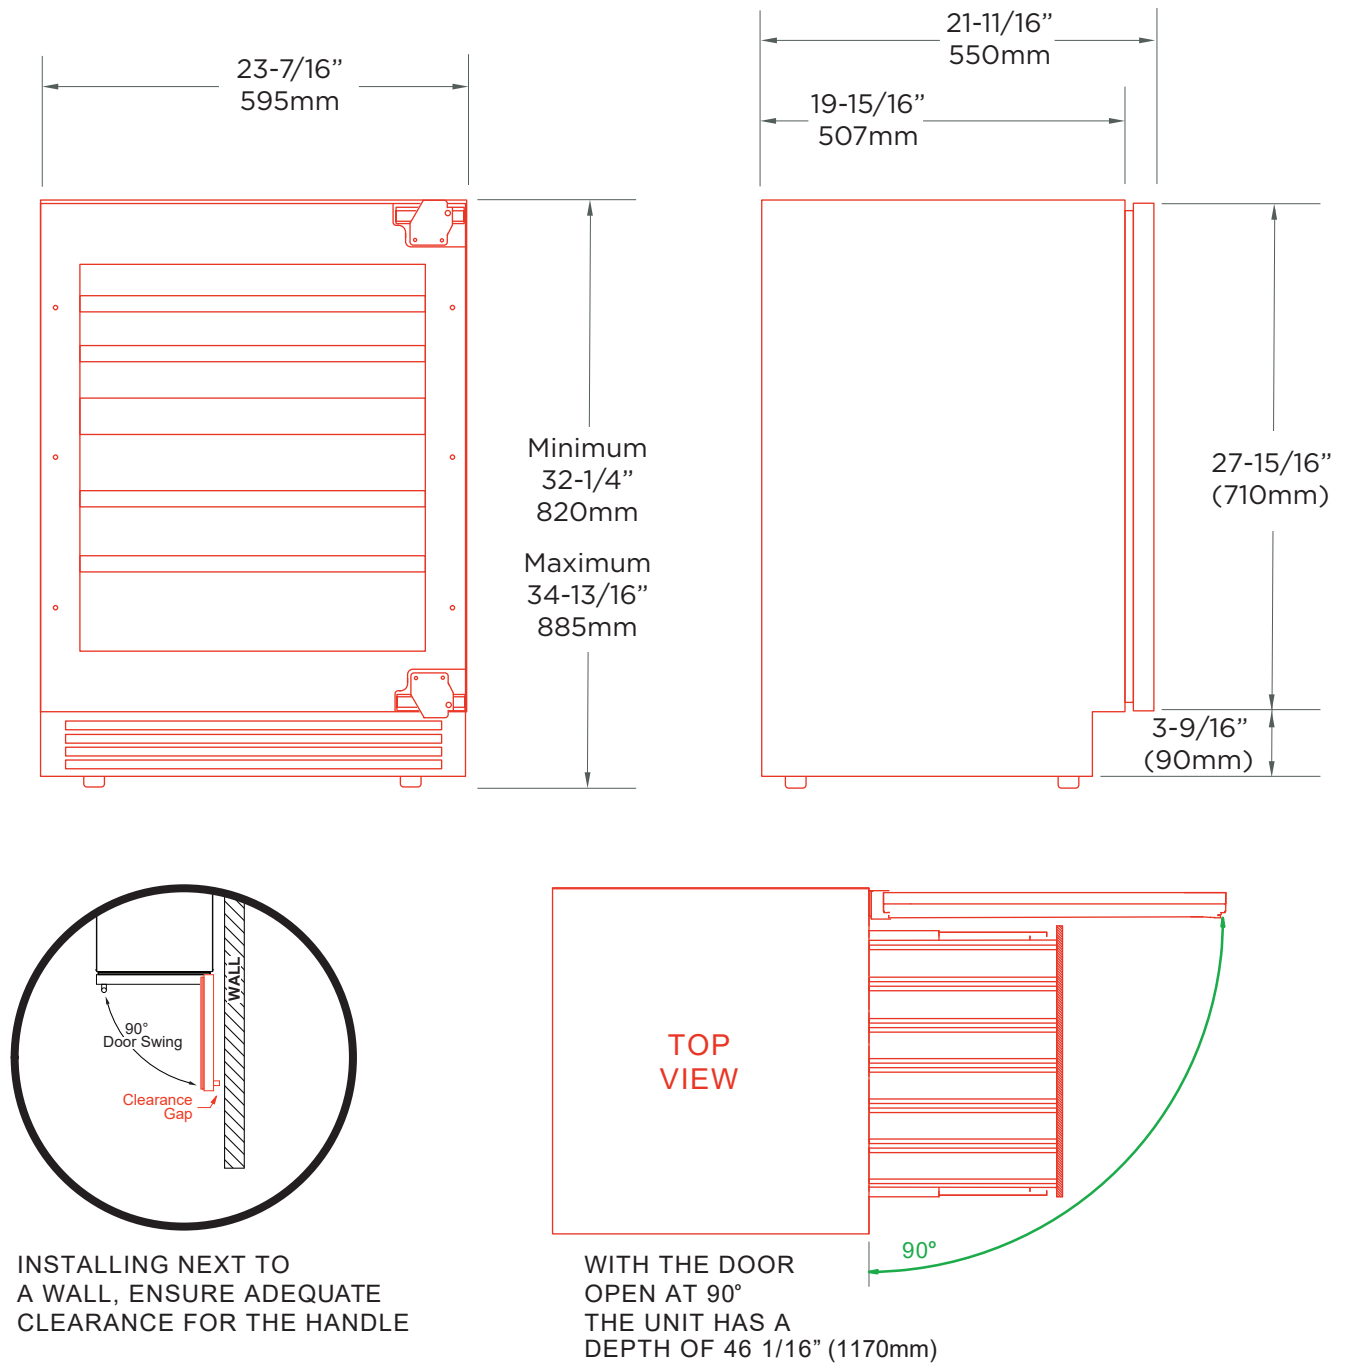


CUSTOM OVERLAY PANELS MAY ADD UP TO $\frac{3}{4}"$ IN OVERALL DEPTH
YOUR CHOICE OF CABINET HANDLES WILL ALSO ADD DEPTH

RIGHT OR LEFT

HOW TO CHANGE THE DOOR OPENING

Your XO arrives with a right hand hinged door - but it is easily to reverse if you choose. To reverse the hinge on your unit, follow the directions below:

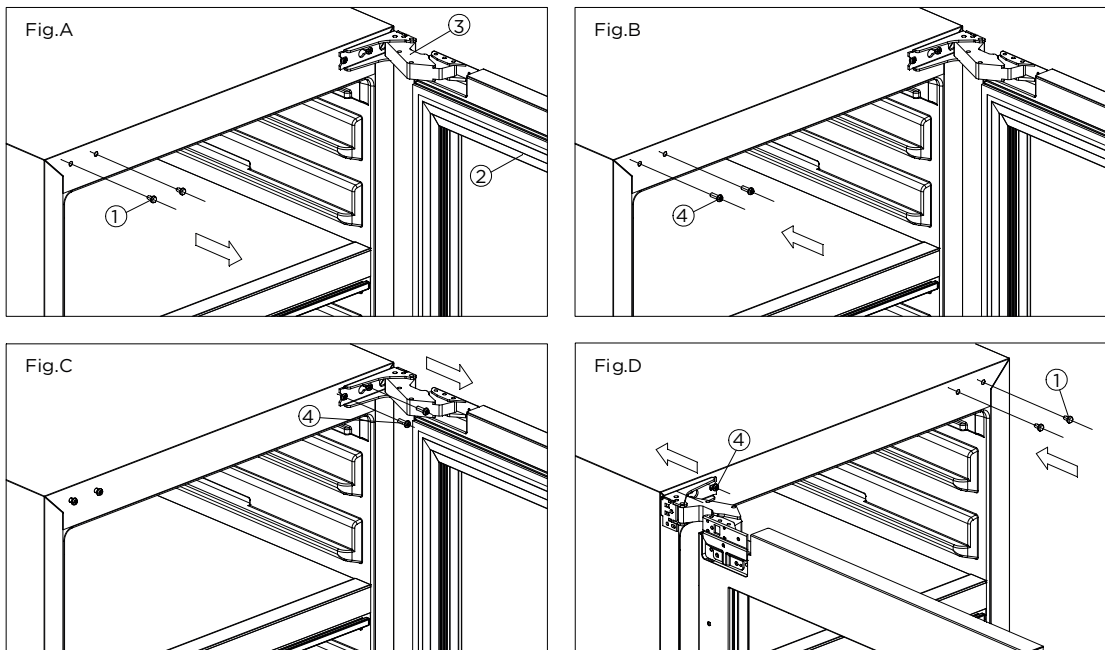


1. Screw hole covers 2. Door 3.Hinge 4.Screws

1. Open the door and remove the screw hole covers (1) on the left hand side as shown in Fig A.
2. Start screws into these positions as per Fig B, but do not tighten the screws.
3. Remove all screws from both the upper and lower hinge, and then remove the door.
4. Rotate the door 180 degrees, (top to bottom) and place the hinges onto the screws (4) in Fig B. Slide the slots of the hinge until fully seated against the screws, then tighten the screws to secure the hinges (Fig D).
5. Place the screw hole covers in the right hand side screw holes as shown in Fig D.

LET'S FACE IT

OVERLAY PANEL DIMENSIONS FOR **ADA** AND **EUROPEAN** CABINETS

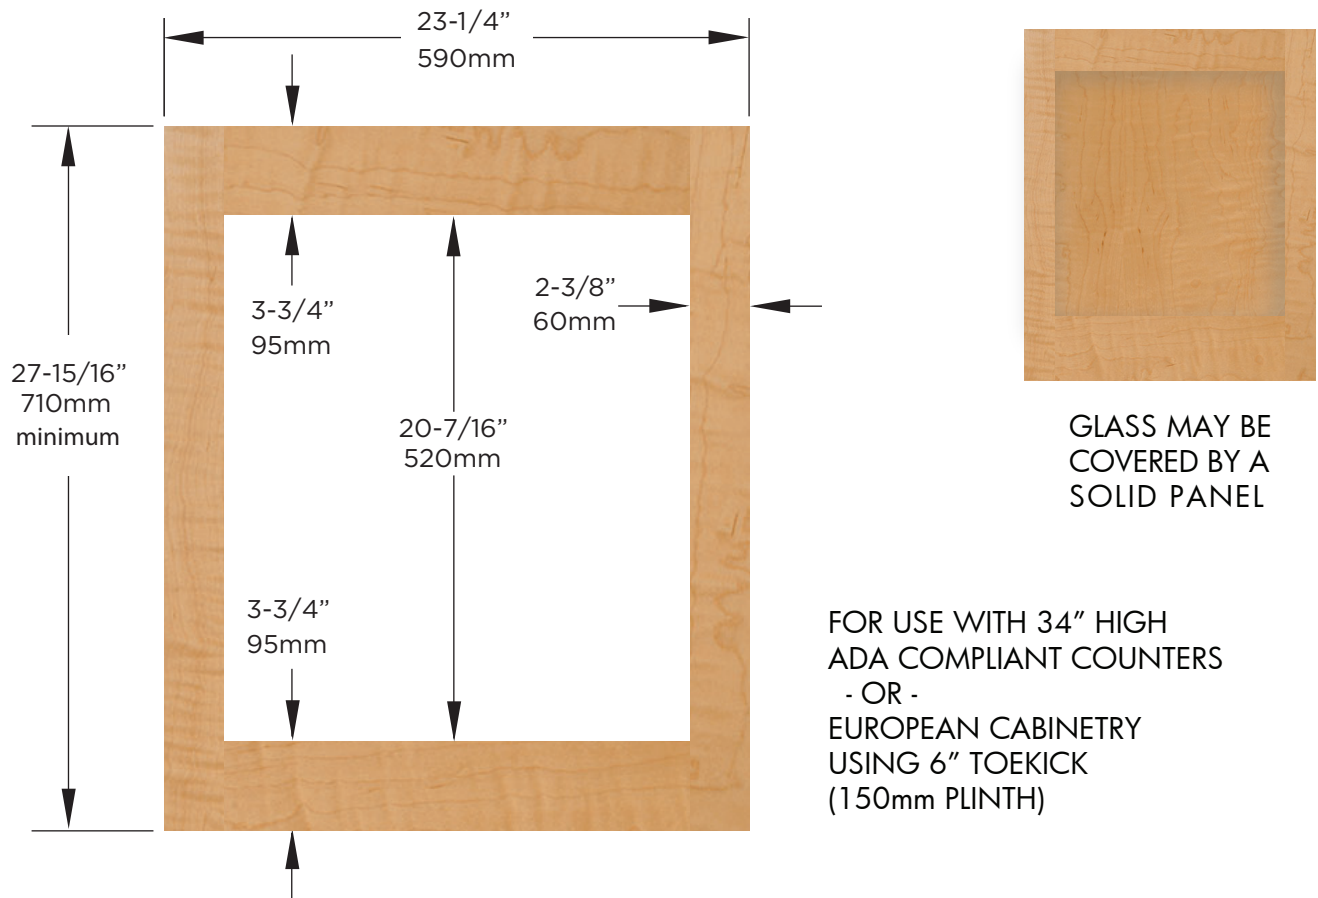

To ensure that the cabinet panel is completely hiding the door frame, observe the frame dimensions as minimums.

You may decrease the size of the center opening to reveal less glass by increasing the width of the side sections and/or the height of the top and bottom sections.

You may make the door a solid panel so that the glass window is completely hidden.

THE GAP BETWEEN THE BOTTOM OF THE DOOR AND THE FLOOR MUST BE AT LEAST 3" (75mm) TO ALLOW FOR VENTILATION. NEVER BLOCK THE BOTTOM VENTS.

DOOR PANELS MUST BE FINISHED FRONT AND BACK TO PREVENT WARPING.


AFTER INSTALLATION UNDER COUNTER, OVERLAY DOOR MUST BE ABLE TO OPEN 90°.

PANEL MAXIMUM WEIGHT: 20 lbs.

MAXIMUM PANEL THICKNESS 3/4" \pm (19mm)

LET'S FACE IT

OVERLAY PANEL DIMENSIONS - **AMERICAN STANDARD HEIGHT** COUNTERS

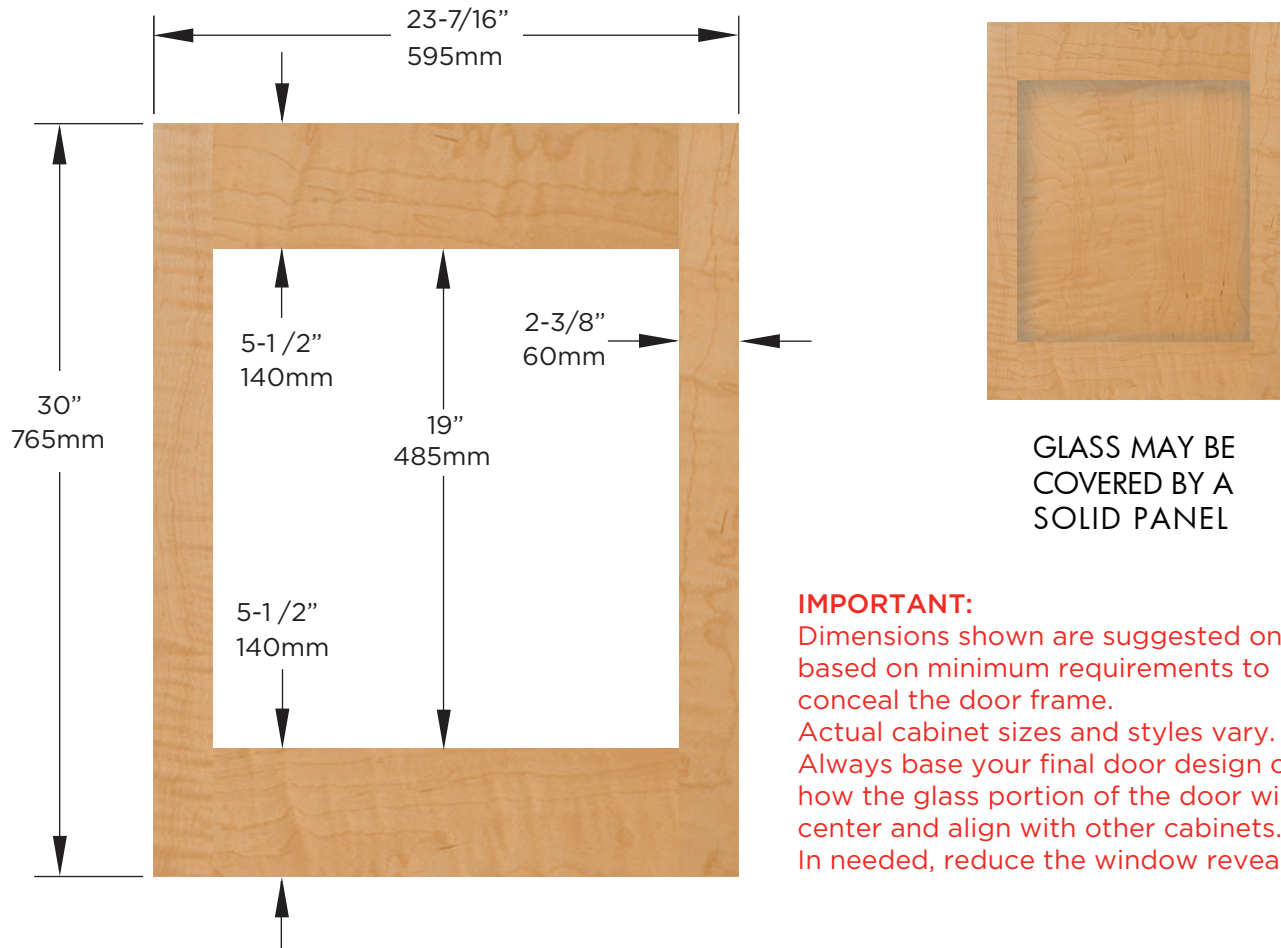

IMPORTANT:

Dimensions shown are suggested only based on minimum requirements to conceal the door frame.

Actual cabinet sizes and styles vary. Always base your final door design on how the glass portion of the door will center and align with other cabinets. In needed, reduce the window reveal.

To ensure that the cabinet panel is completely hiding the door frame, observe the side dimension as minimums and the center opening height as a maximum.

You may decrease the size of the center opening to reveal less glass by increasing the width of the side sections and/or the height of the top and bottom sections.

THE GAP BETWEEN THE BOTTOM OF THE DOOR AND THE FLOOR MUST BE AT LEAST 3" (75mm) TO ALLOW FOR VENTILATION. NEVER BLOCK THE BOTTOM VENTS.

DOOR PANELS MUST BE FINISHED FRONT AND BACK TO PREVENT WARPING.


AFTER INSTALLATION UNDER COUNTER, OVERLAY DOOR MUST BE ABLE TO OPEN 90°.

PANEL MAXIMUM WEIGHT: 20 lbs.

MAXIMUM PANEL THICKNESS 3/4" (19mm)

LET'S FACE IT

INSTALLATION UNDER A **STANDARD HEIGHT** COUNTER - 4" TOE KICK

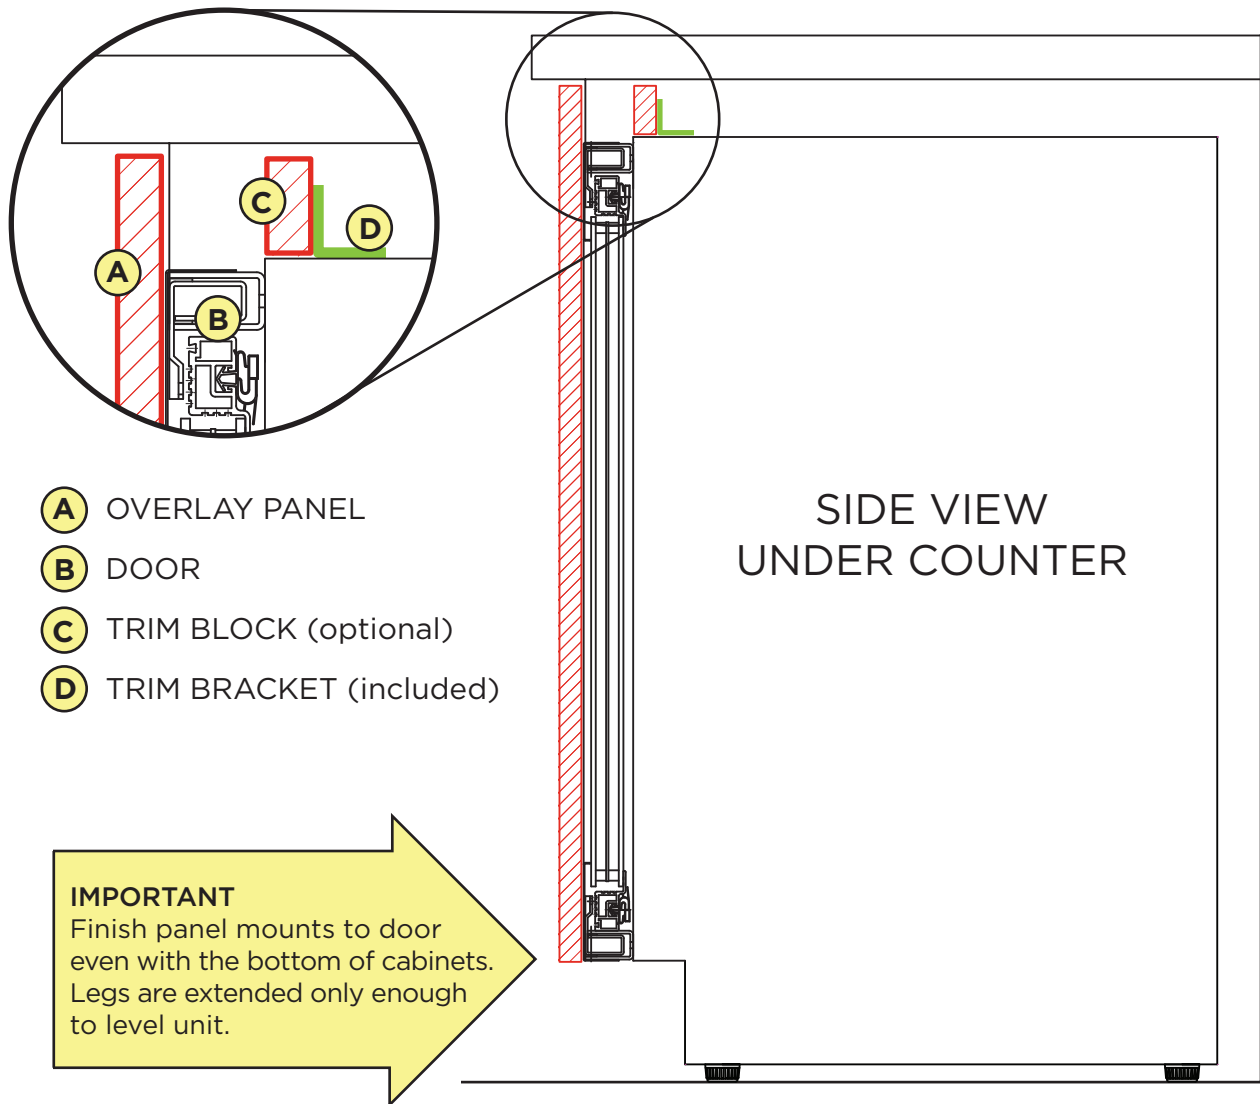

The XO24 "A" model is 32 1/4" Tall. The standard US undercounter refrigerator is 34" Tall. The trim bracket (D) is 1 3/4" Tall and will attach to the top of the refrigerator to fill the void. If desired you may attach a trim block (C) either to the face of the trim bracket or cabinetry.

DOOR PANELS MUST BE FINISHED FRONT AND BACK TO PREVENT WARPING.




PANEL MAXIMUM WEIGHT: 20 lbs.

MAXIMUM PANEL THICKNESS 3/4" \pm (19mm)


LET'S FACE IT

BEFORE BEGINNING: Attach any handle hardware before mounting the panel to the door frame.

1. Fully open the door and starting at one corner pull the gasket out of the gasket channel.
2. After removing the gasket lay it out on a flat surface to retain its shape.
3. Using clamps to hold it securely in place, position the overlay panel against the door.
4. Using the frame as a guide, drill six (6) pilot holes $1/8"$ (3mm) in dia. into the finish panel no more than $1/2"$ (12mm) deep taking care not to drill through the panel.
5. Using the ST4-30 self-tapping screws provided, fasten the panel to the door frame.
6. Beginning at one corner, re-install the rubber door gasket into the gasket channel.

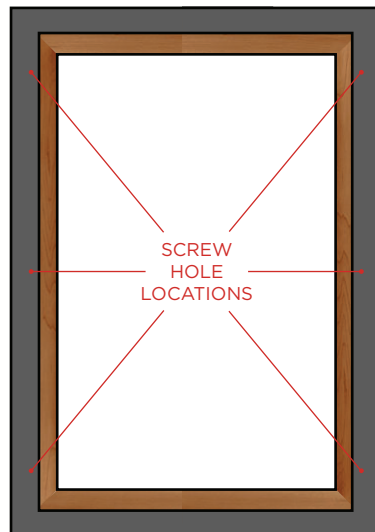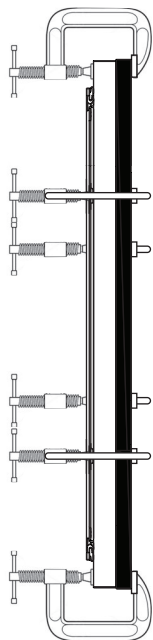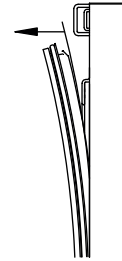

Mounting screw holes are located in the gasket channel behind the gasket.



If readjustment is necessary - loosen all 6 screws, reposition the panel and re-tighten the screws.


Do Not Over-Tighten

IMPORTANT NOTE: The back of the panel must be finished to prevent warping and cracking.


LET'S FACE IT

OPTIONAL STAINLESS STEEL DOOR PANEL KIT P/N: **XOU24ADASC**


The stainless door panel mounts in the same fashion as a wooden cabinet door.

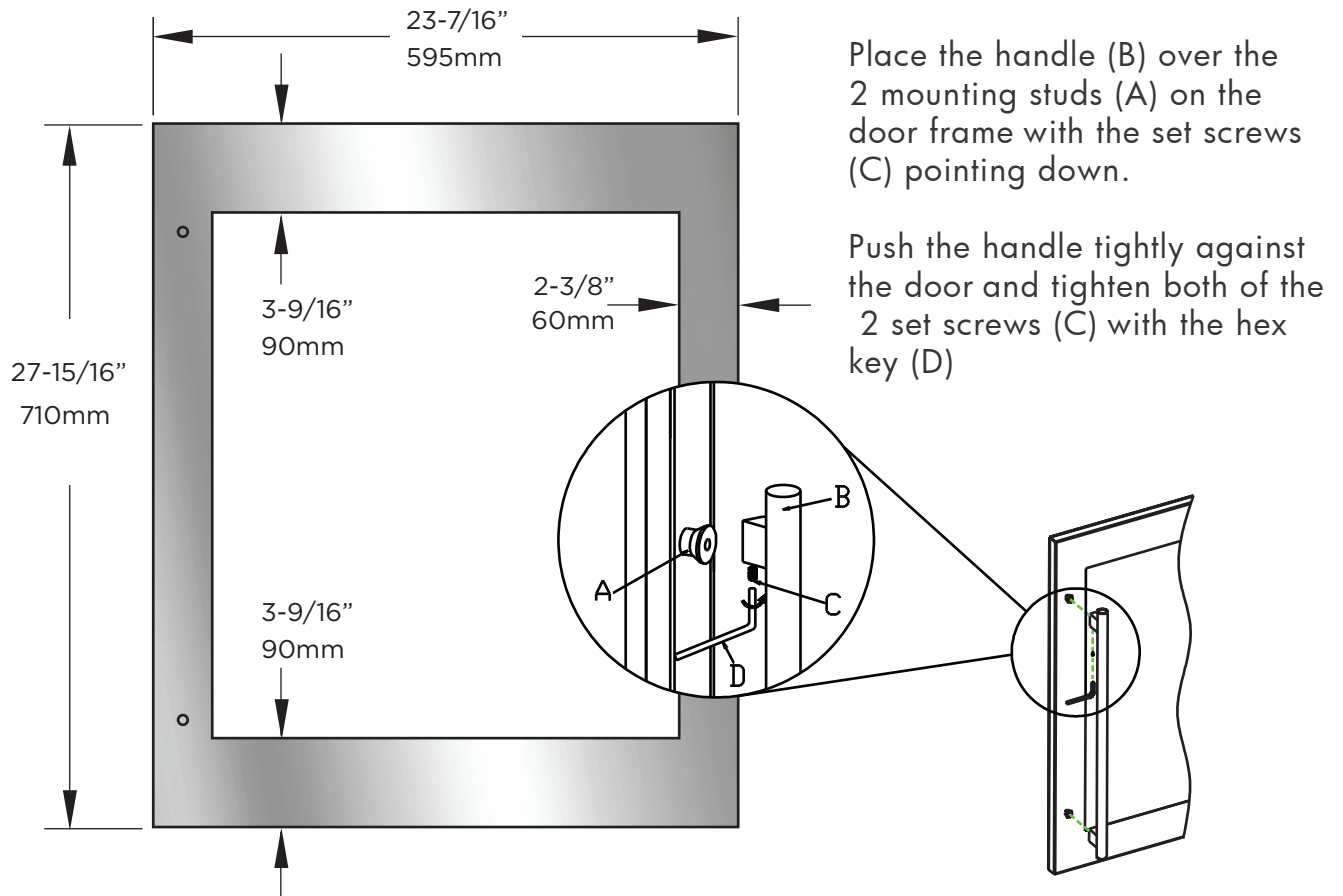

The Stainless Steel door panel comes with both the designer stainless bar handle -

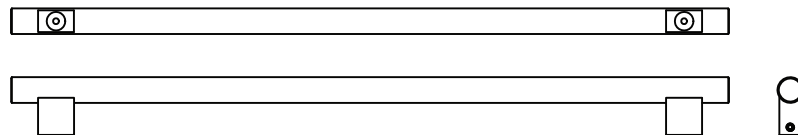


and our PRO Style Handle - you get to choose which style to install

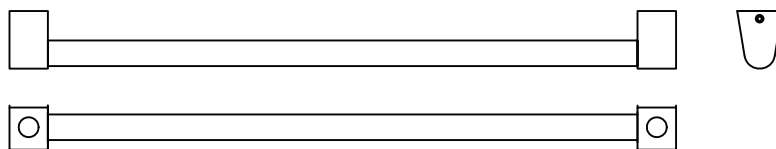

Keep the hex key in a safe place for future use.
Two extra set screws are included in the hardware bag.

FOOT SLIDERS

USING THE FOOT SLIDERS

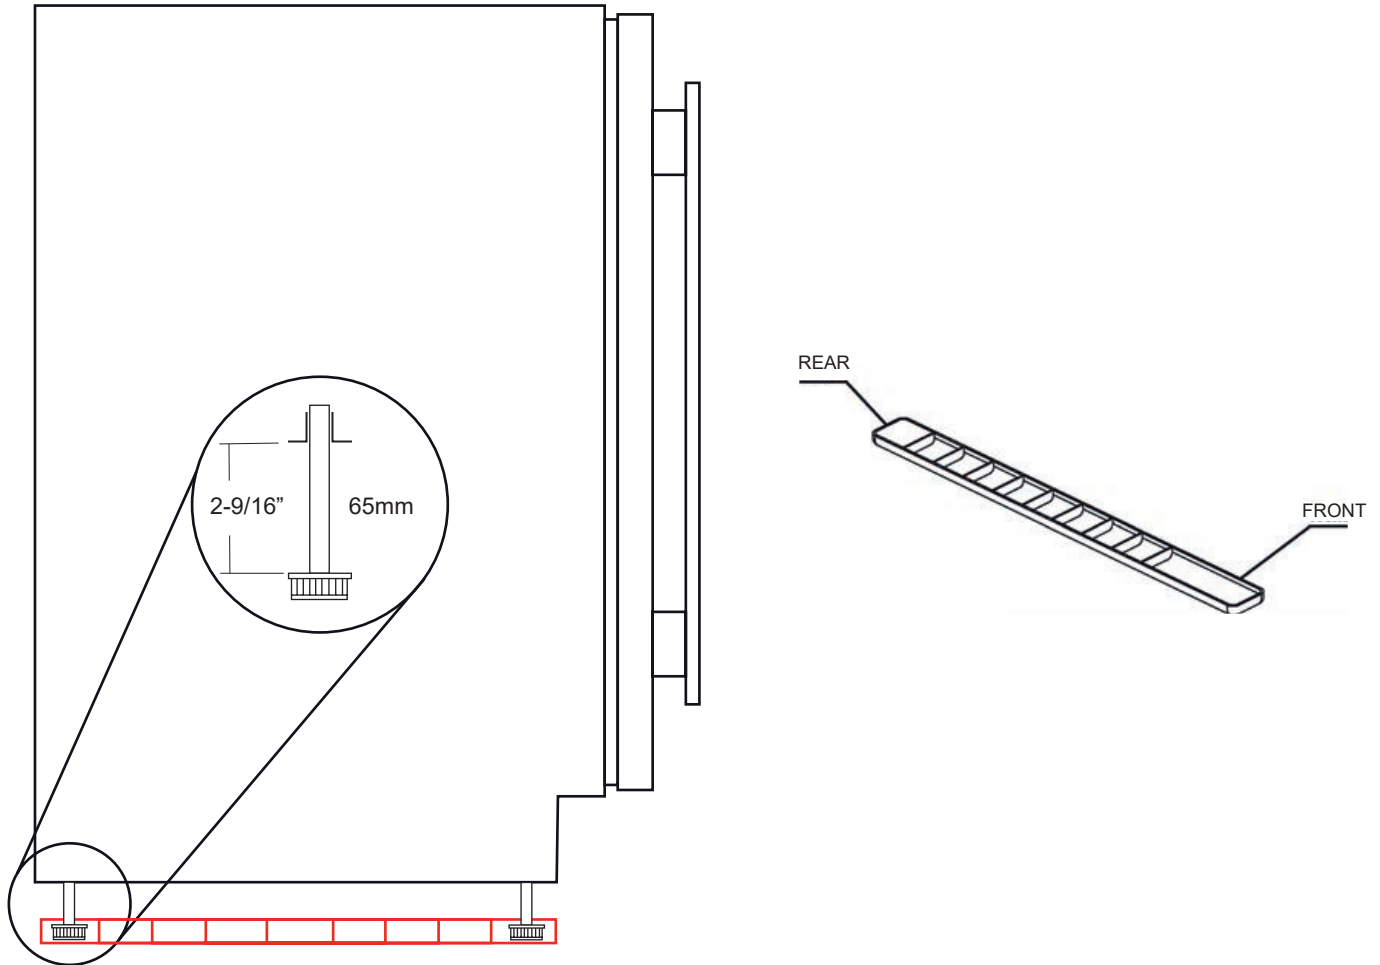


To compensate for different height cabinetry, your XO has leveling legs that can extend as much as 2-9/16" (65mm).

When installing your XO with the leveling legs extended, use the FOOT SLIDERS provided under the feet on each side to help avoid catching and damaging the legs.

IT'S LIKE ZEN - BUT COOLER

GET YOUR LEVEL OUT

DO NOT NEGLECT THIS IMPORTANT STEP

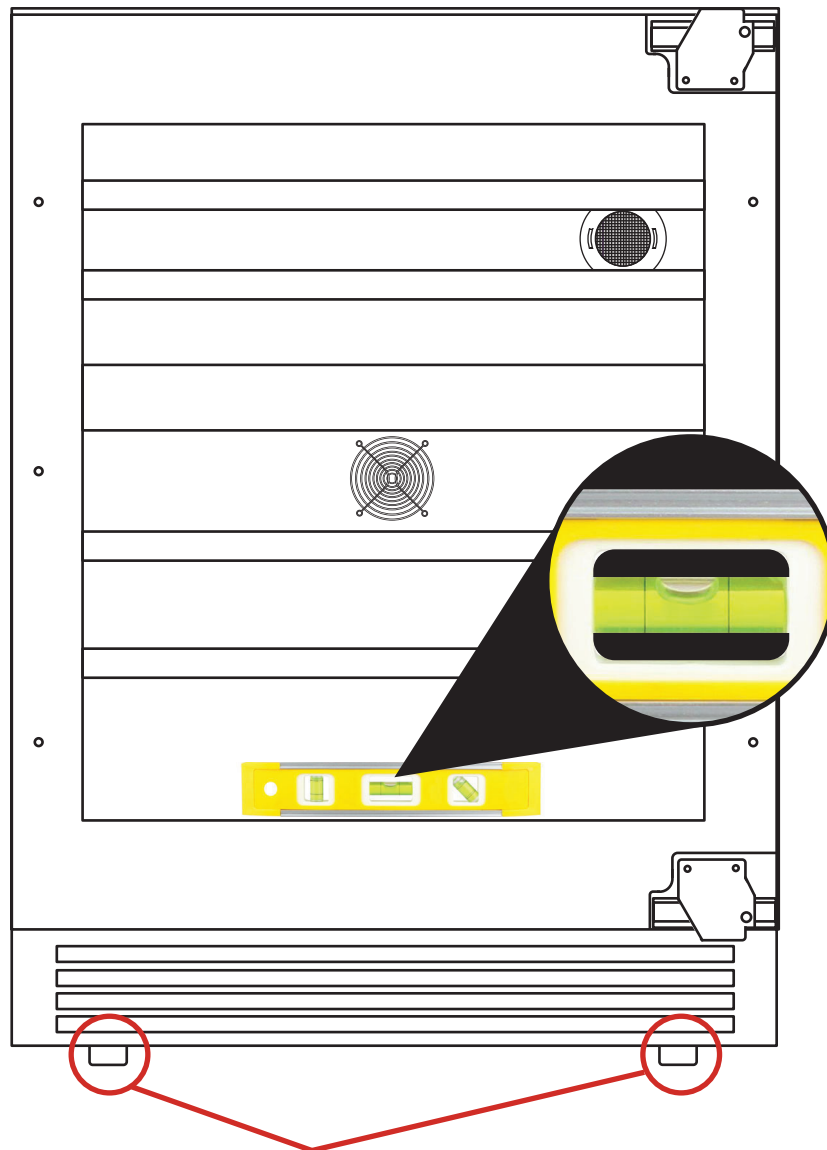


Rotate to raise or lower the **LEVELING LEGS** located at each of the four corners until all four legs are seated firmly on the floor and the interior floor of the unit is level **both front to back and side to side**.

Failure to follow this important step may cause problems with proper door operation, excessive condensation, vibration and noise.


FINISHING TOUCHES

TIE IN BRACKET

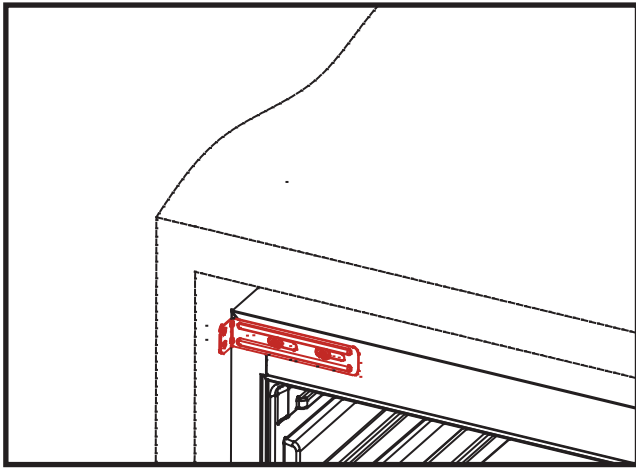

With the door open, using the screws provided connect the tie in bracket in the upper corner of the wine cooler opposite the hinge - then screw the flange of the bracket to the cabinet.

TOE KICK | PLINTH

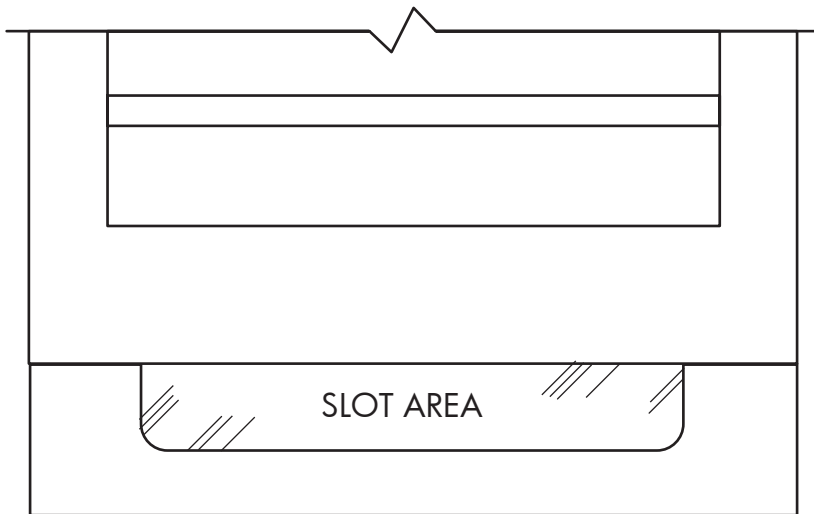


Your XO comes with a 4" (100mm) toe kick | plinth.

It can accommodate up to a 6" (150mm) toe kick | plinth.

If you are not using the vented toe kick that comes with the unit you must make provision for ventilation by cutting a slot 2-3/16" H x 19-5/16" W (55mm H x 490mm W)

MEET YOUR XO

WINE COOLER XOU24WDZGOA

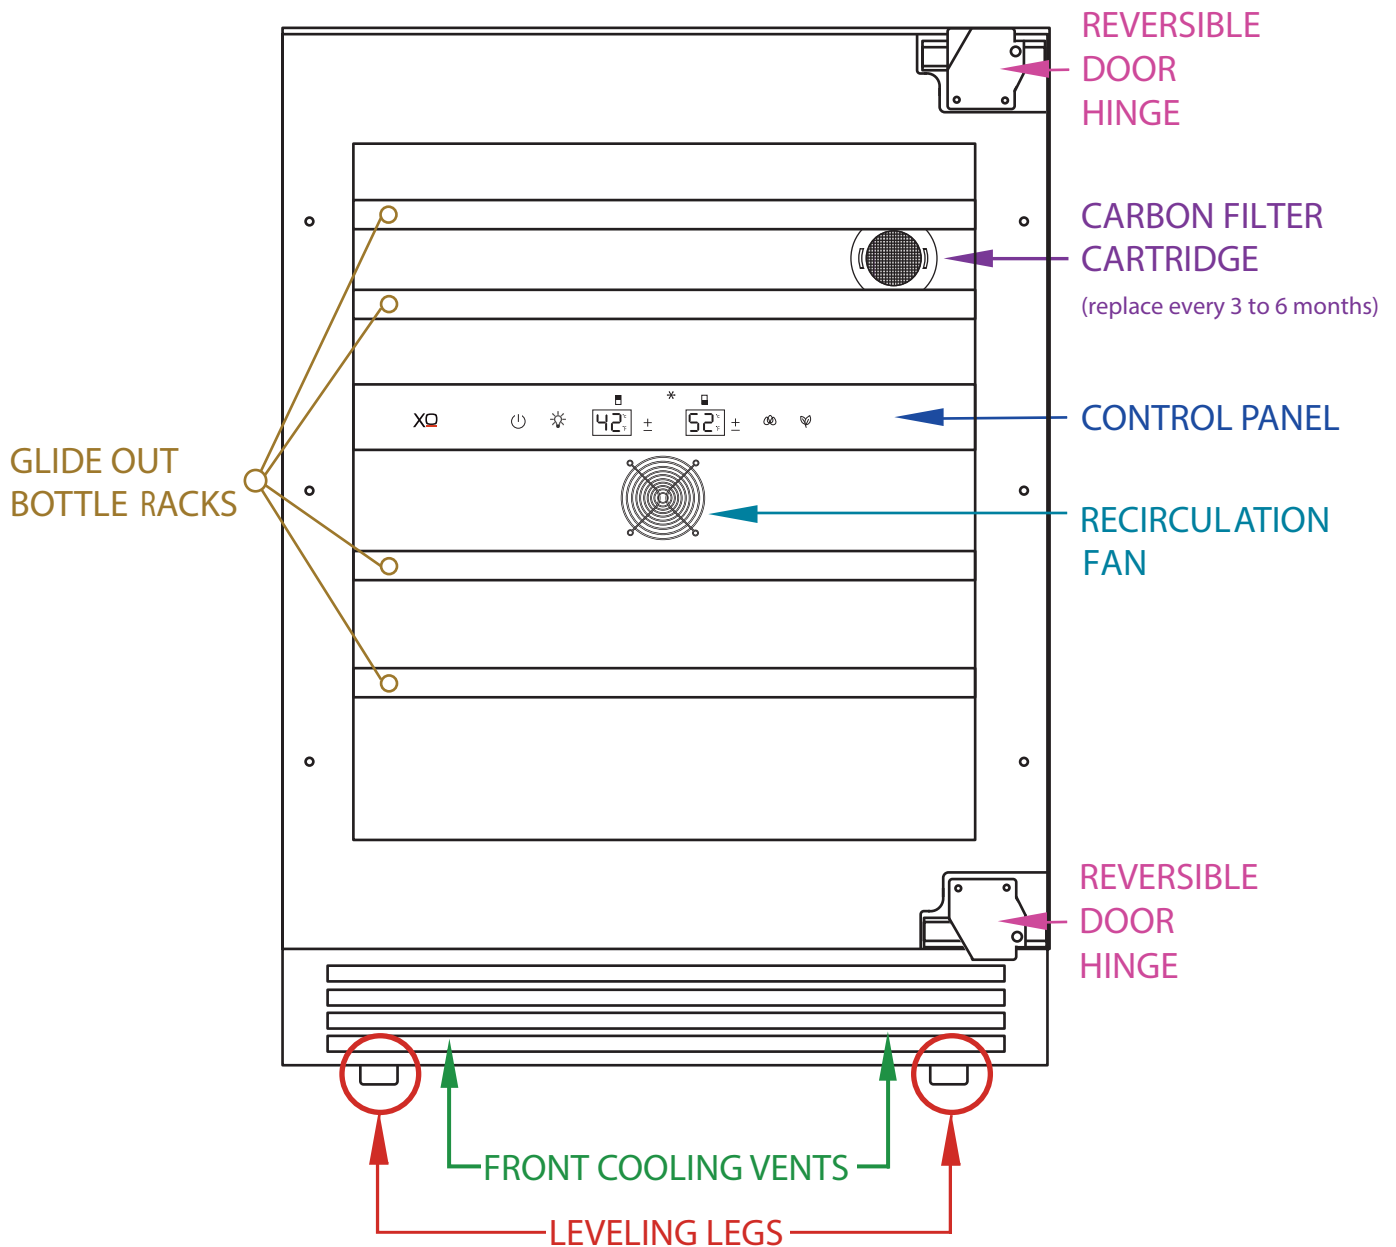

TAKE CONTROL

TEMPERATURE



Dual Zone Wine Coolers maintain two different temperature zones from one control panel.

Dual Zone Wine Cooler Temp. Settings

Adjustable Range: 41°F to 50°F (upper) 50°F to 64°F (lower)

Your Wine Cooler remembers your last temperature settings in the event of a power failure and automatically adjusts to the previous setting(s) when power is restored.

When the +/- button is pressed, your wine cellar automatically enters set up mode. The LED Display will begin flashing and display the temperature setting.

Each time you press the + button, the temperature setting will increase 1 Degree.

Each time you press the - button, the temperature setting will decrease 1 Degree.

Once you have reached the desired temperature setting, the display will continue to flash for 5 seconds, then revert to showing the compartment temperature.


To view the real time temperature, press and hold the +/- button for 5 seconds. The interior temperature will flash in the LED Display for 5 seconds.

If you wish to change the display from Fahrenheit to Celsius (or vice versa) press and hold both "+" and "-" simultaneously for 5 seconds.

LED LIGHTS



L1: When you turn on your wine cellar, the internal light will switch on when the door is opened, and off when the door is closed.

L2: Press  , the internal light will remain on continuously and dim after 3 minutes.



L3: Press  twice, the internal light will remain on for 10 minutes and then shut off.

TAKE CONTROL

CONTINUED



TRI-COLOR LIGHTING



When you turn your XO wine cooler on, the interior lights will be white. Press the  icon and the lights will change to midnight blue. Press the  icon again and the lights will change to honey amber.

ECO MODE







When you turn you XO Unit on, it is set to work in Standard Mode. Press  and ECO Mode is turned on, ECO Mode is an energy saver function. Press  again and ECO Mode is turned off, the unit returns to Standard Mode.



SABBATH MODE



Sabbath Mode was designed for use on the Jewish Sabbath and Holidays. The Sabbath Mode feature makes it possible to use your appliance during the duration of the holiday. The Sabbath Mode overrides typical reactions caused by interactions with the unit. While in Sabbath Mode your appliance will operate, however it will not respond to your actions.

To initiate Sabbath Mode: Press and hold both  +  for 5 seconds. The display will show either "Sb" or "Sb On" depending on the model you have to indicate Sabbath Mode is engaged. To turn Sabbath Mode off and return to Standard Mode, Press and hold both  +  for 5 seconds again.

DEMO MODE

Press  for 5 seconds, DEMO mode is turned on. Press  for 5 seconds again, DEMO mode is turned off and your XO returns to standard mode.


Your controls are simple and intuitive to operate.

I love
saving
Energy!

XO

DUAL ZONE CONTROL

2 ZONE WINE COOLERS

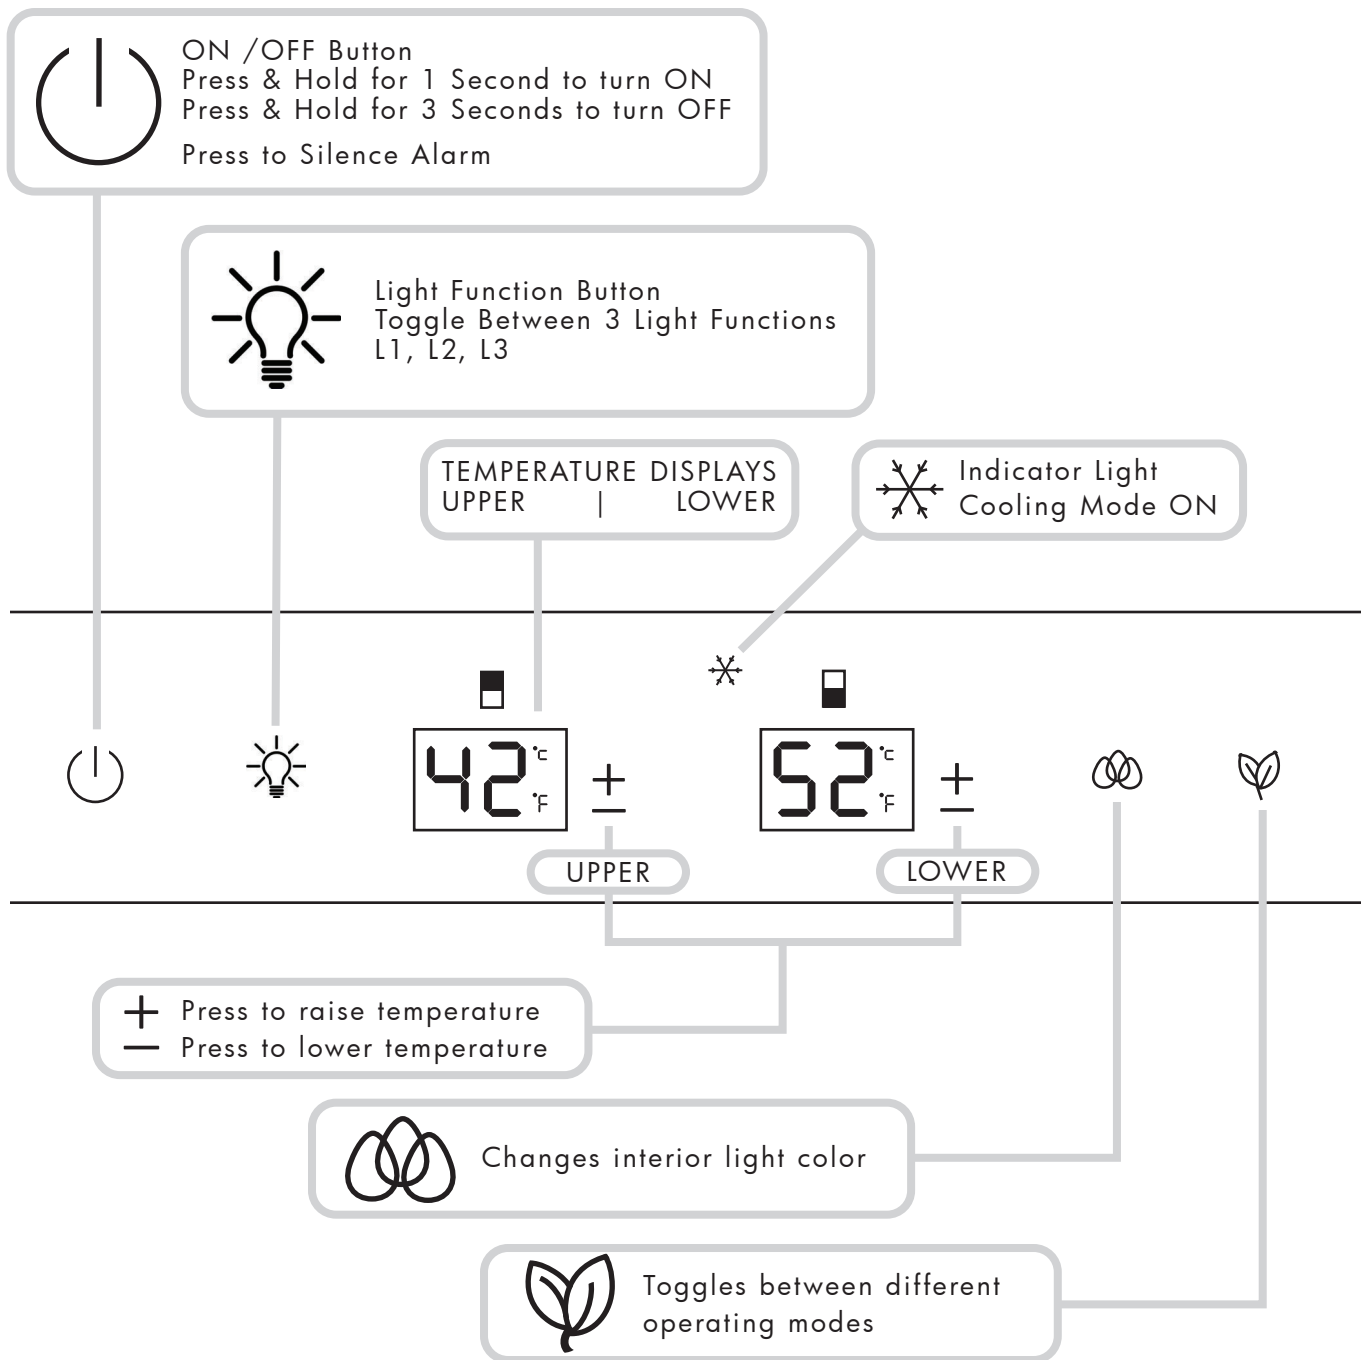

Upper compartment: The temperature setting can be adjusted from 41-50°F.
 Lower compartment: The temperature setting can be adjusted from 50-64°F.
 Your controls are simple and intuitive to operate.



HOW MANY WINE BOTTLES CAN THIS HOLD

Wine bottles come in many shapes and sizes.

The following MAXIMUM capacities are based on two of the most popular types in 750 ml.

MODEL	WIDTH	ZONES	BORDEAUX	BURGUNDY
XOU24WDZGO	24"	2	4 Racks of 6 9 in Bottom	4 Racks of 5 6 in Bottom
			33 TOTAL	26 TOTAL

Shelf capacities

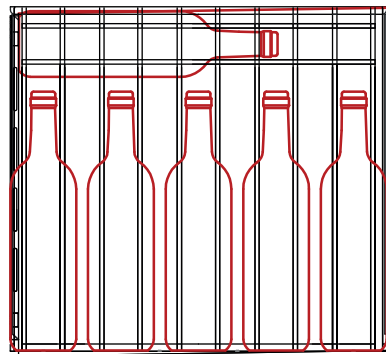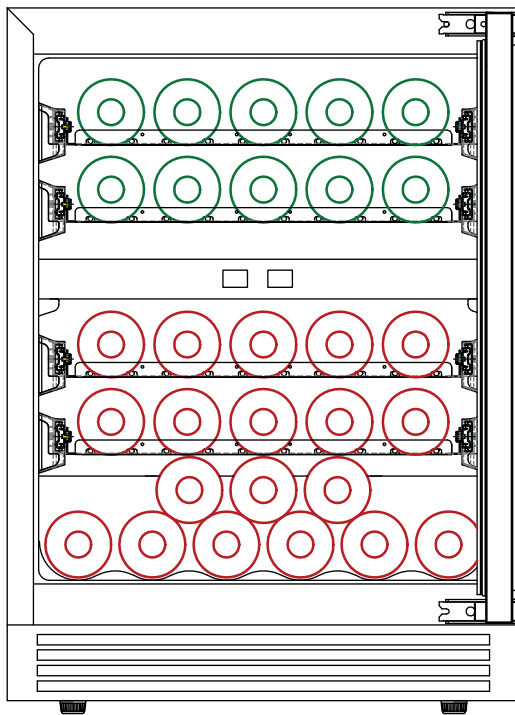

24" Wide Wine Cellar Racks
accommodate up to 6 Bordeaux Bottles
or up to 5 Burgundy Bottles

Store wine in sealed bottles only

Avoid overloading

Storing little or no product can cause excessive condensation

A FEW TIPS

DUAL ZONE WINE COOLER

TEMPERATURE: Your XO Wine Cooler is designed to maintain two different temperature zones. The upper zone is colder, designed to hold white wines at a “ready to serve” temperature. The lower section has a slightly higher temperature range designed for your red wines. Heat and variations in temperature can damage wines. Storage below 45° can create dry conditions that cause corks to shrink and leak. As a general rule, if you are unsure of what temperature to store a bottle at, 55° is generally considered to be ideal for most vintages.

LIGHT: Sunlight, specifically ultraviolet light, can be very damaging to wine. For this reason your XO Wine Cooler is equipped with double glazed glass that has a UV Blocker. But it is still a good idea to install your unit in an area out of direct sunlight to limit both UV and heat exposure.

VIBRATION: Vibration is another element that can harm wine. Your XO Wine Cooler has design features to aid in limiting the transmission of vibration to the bottles, however it is advisable to install your wine cooler in an area away from loud speakers, power equipment, heavy floor traffic and similar noise generators

HUMIDITY: High or low humidity conditions can do harm to wine. A range of 50 - 80% humidity usually not an issue. 70% humidity is generally consider ideal.

For all of these reasons, it is a good idea to limit opening and closing any wine cooler frequently. It is a good idea to keep it well stocked. Storing only a few bottles can cause excess humidity and condensation to develop. When loading the wine cooler, add bottles gradually rather than in large quantities which can cause broader temperature variations for what you have stored already.

...and enjoy!

A LITTLE TLC GOES A LONG WAY

Cleaning the Inside:

Walls, floor, inside window, and shelves - Some water deposits and dust can be removed with a dry paper towel, others may require a damp cloth.

Cleaning the Outside:

Outer case - It is important to keep the area clean where the door seals against the cabinet. Clean this area with a soapy cloth. Rinse with a damp cloth and let dry.

Control Panel and Door - Wipe with a damp cloth and dry thoroughly. Do not use cleaning sprays, large amounts of soap and water, abrasive, or sharp objects on the panel, they can damage it.
CAUTION: Some paper towels may also scratch the control panel and glass on the door.

Door Surface - Use only mild, non-abrasive detergents applied with a clean sponge or soft cloth. Rinse well with damp cloth.

NOTE: Do not use cleaners containing ammonia or alcohol on your XO unit. Ammonia or alcohol can damage the appearance of the appliance.

NOTE: Never use any commercial/abrasive cleaners or sharp objects on any part of the wine cooler.

POWER FAILURE

Most power failures are corrected within a few hours and should not affect the temperature of your appliance if you minimize the number of times the door is opened.

If the power is off for a longer period of time, you need to take the proper steps to protect your contents.

VACATION

Short vacations: Leave the XO unit operating during vacations of less than three (3) weeks.

Long vacations: If the appliance will not be used for an extended period, remove all items and turn off the appliance.

Clean and dry the interior thoroughly. To prevent odor and mold growth, leave the door open slightly, blocking it open if necessary.

ENERGY SAVING TIP

The unit should be located in the coolest area of the room, away from heat producing appliances, and out of direct sunlight.

MOVING

Remove all items and securely tape down all loose items (shelves) inside your appliance


Turn the adjustable leveling legs all the way into the base to avoid damage

Tape the door shut and transport the XO unit securely in the upright position

Blanket wrap the exterior to help protect against scratches and other damage

A BREATHE OF FRESH AIR


FOR BEST RESULTS CHANGE EVERY 3 TO 6 MONTHS

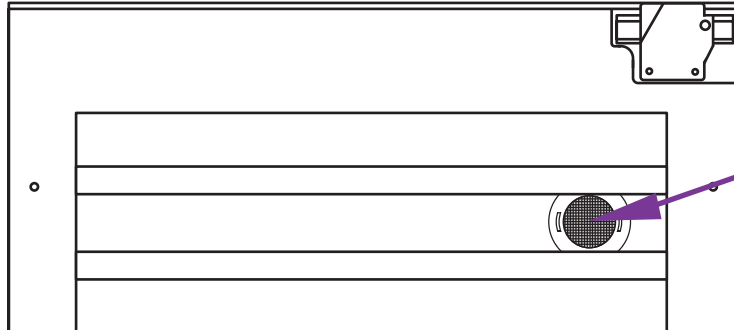

Your Air Refresh
Charcoal Filter
Is Located Here


P/N: XOUAIRFILTER

Rotate the filter 1/4 turn
to unlock

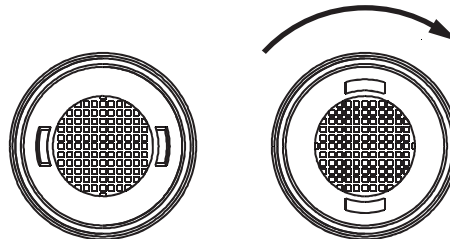


Pull straight out to remove

Align the tabs and
insert the new filter

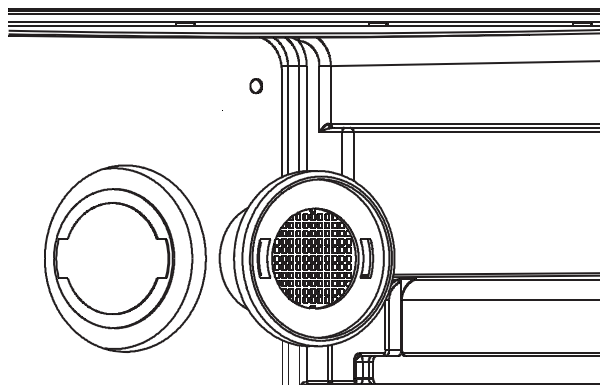

Rotate filter 1/4 turn
to lock in place

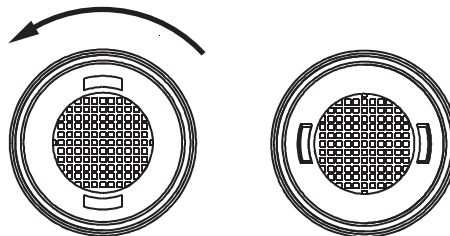

FAQ'S

Q. There doesn't appear to be any power to the unit.

A. There are 3 easy to check common causes:

- (1) Check to see if a fuse has blown or circuit breaker has tripped & replace or reset.
- (2) Check to ensure the plug is fully inserted into the outlet.
- (3) A power surge may have caused the unit to shut down to protect itself - Unplug the unit, wait 5 seconds and plug it back in.

Q. The cabinet temperature is too high.

A. Check these 5 things:

- (1) Check the temperature setting and adjust as needed.
- (2) Make certain the door is completely closed and the door gasket is sealing properly.
- (3) Avoid opening the door frequently and/or leaving the door open for extended periods.
- (4) Did you load a large quantity of warm bottles at once? It is better to add smaller quantities in several loads.
- (5) Make certain nothing is blocking the toe kick vents (including dust behind the vents).

Q. The alarm is beeping and "HI" is displayed on the control panel.

A. See the question and answers above - if the door has been tightly closed and you have not recently added a large quantity of warm bottles, it may be a mechanical issue. Unplug the unit and call for service.

Q. The alarm is beeping and "LO" is displayed on the control panel.

A. This may be a sensor malfunction. Unplug the unit and call for service.

MORE "Q & A"

Q. Why does condensation form on the inside or outside of my XO unit?

A. It may be that the door is either opened repeatedly or not closed completely. It may also be due to an excessive ambient humidity, in which case it will clear when the humidity drops.

Q. There is warm air coming from the bottom of my unit.

A. This is normal. Cooling systems must vent the heat they remove from inside the cabinet.

Q. Why does the evaporator fan run all the time?

A. It continually recirculates air to ensure cabinet temperatures are consistent.

Q. How do I adjust temperature?

A. Refer to Pages 7 & 10.

Q. When does the high temperature alarm sound?

A. If internal temperature exceeds 70°F for more than 60 minutes.

Q. If the door hinge is next to a wall, how much clearance do I need to open the door?

A. The unit should be at least 2" from the wall to allow the door to open at least 90°.

WE'VE GOT YOUR BACK

90 DAY LOVE IT or LEAVE IT. For 90 Days all our products are backed by our unique Love it or Leave it Guarantee.

TWO-YEAR PARTS & LABOR LIMITED WARRANTY. XO warrants to the original purchaser of every new XO refrigerated unit, the cabinet and all parts thereof, to be free from defects in material or workmanship under normal and proper use and maintenance as specified by XO and upon proper installation and start-up in accordance with the instruction packet supplied with each XO unit. XO's obligation under this warranty is limited to a period of two (2) years from the date of original purchase.

FIVE-YEAR COMPRESSOR LIMITED WARRANTY. XO warrants its compressor to be free from defects in both material and workmanship under normal and proper use and maintenance service for a period of five (5) years from the date of original purchase. If the compressor fails during that time period due to a defect in material or workmanship, XO will supply a replacement compressor free of charge. The consumer will be responsible for all related transportation and labor costs. Product must be registered with XO to qualify for this warranty.

TERMS APPLICABLE TO EACH WARRANTY. Any part covered under the above warranties that is determined by XO to have been defective within the time frame is limited to the repair or replacement, including labor charges, of defective parts or assemblies. The labor warranty shall include standard straight time labor charges only and reasonable travel time, as determined by XO.

WARRANTY CLAIMS. All claims for labor or parts must be made directly through XO. All claims should include: model number and serial number of cabinet, proof of purchase, and date of installation. In case of warranted compressor, the compressor model tag must be returned to XO along with the above listed information.

WHAT IS NOT COVERED BY THIS WARRANTY. XO's sole obligation under this warranty is limited to either repair or replacement of parts, subject to the additional limitations below. This warranty neither assumes nor authorizes any person to assume obligations other than those expressly covered by this warranty. Open box, factory seconds, scratch and dent, floor models and commercial applications are excluded from these warranties. Consumer shall be responsible for labor and transportation costs where noted above.

NO CONSEQUENTIAL DAMAGES. XO is not responsible for economic loss, profit loss; or special, indirect or consequential damages, including without limitation, losses or damages arising from food or product spoilage claims whether or not on account or refrigeration failure.

WARRANTY IS NOT TRANSFERABLE. This warranty is not assignable and applies only in favor of the original purchaser/user at the original installation location. Any such assignment or transfer shall void the warranties herein made and shall void all warranties, express or implied, including any warranty or merchantability or fitness for a particular purpose.

IMPROPER USAGE. XO assumes no liability for parts or labor coverage for component failure or other damages resulting from improper usage or installation or failure to clean and/or maintain product as set forth in the warranty packet provided with the unit.

ALTERATION OR NEGLECT. XO is not responsible for the repair or replacement of any parts that XO determines have been subjected after the date of manufacture to alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, or act of God.

IMPROPER ELECTRICAL CONNECTIONS. XO is not responsible for the repair or replacement of failed or damaged components resulting from electrical power failure, high or low voltage, use of extension cords, or improper grounding of the unit.

YOUR RIGHTS UNDER STATE LAW. This warranty gives you specific legal rights and you may have other rights that vary from state to state. Some states do not allow the exclusion or limitation of consequential damages or a limitation on how long an implied warranty lasts, so the above exclusion or limitation may not apply to you.

OUTSIDE U.S. This warranty does not apply to, and XO is not responsible for, any warranty claims made on products sold or used outside the 48 continental United States.

To obtain service:

Call 973-403-8900 | email service@xoappliance.com | or submit a request on our website
www.xoappliance.com

