



XOU30BWDDGO

30" PANEL READY COMBO BEVERAGE CENTER
& WINE COOLER

LIFESTYLE UNDERCOUNTER REFRIGERATION



XOU30BWDDGO

- Shelves & Racks Fully Extend While Loaded
- Independantly Controlled Zones
- Tri-Color Led Lighting
- Secure Lock For Each Door


30" PANEL READY UNDERCOUNTER BEVERAGE/WINE COMBO UNIT

THE ULTIMATE IN CONVENIENT ENTERTAINING -YOUR FAVORITE VINTAGES
AND ICY COLD BEVERAGES READY TO SERVE, JUST WHERE YOU WANT THEM

Your XO French Door Combo Unit has the ability to store both wine at 41° to 64° F ready to serve and icy cold beverages from 34° to 50° F in the same compact system. Designed to fit undercounter and wherever your life takes you.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

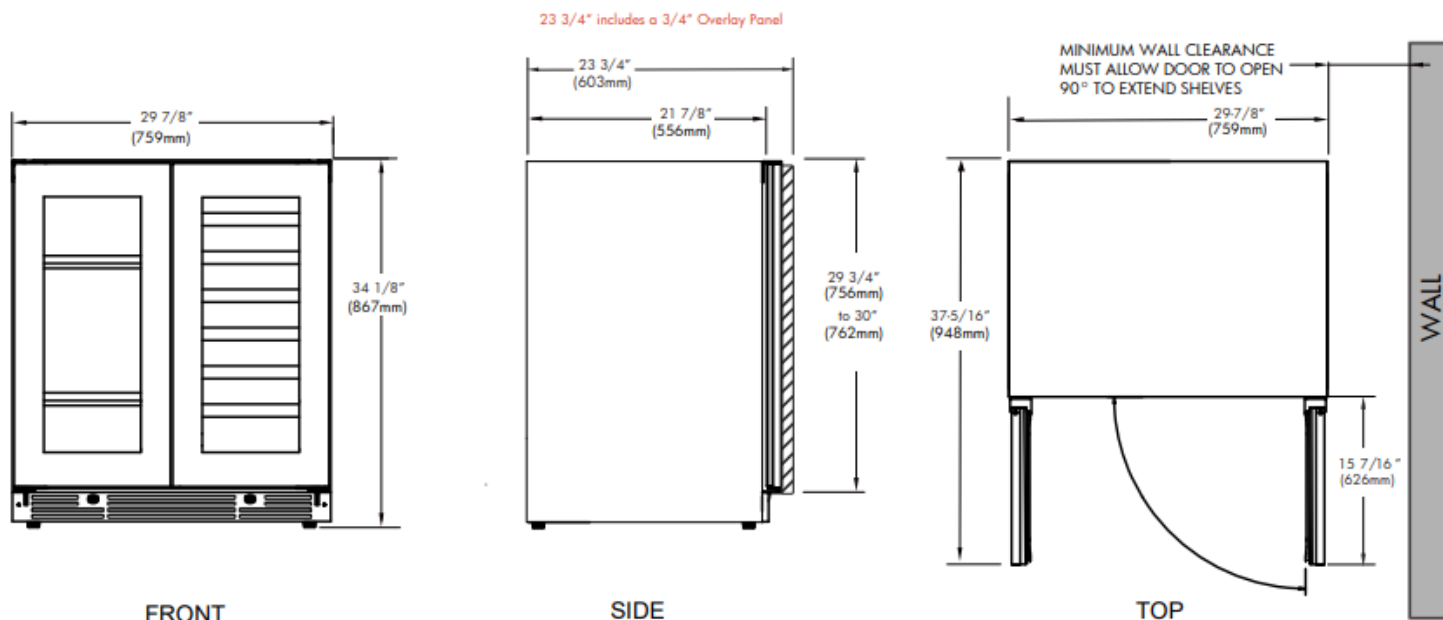

FEATURES

CAPACITY

Full extension shelves and racks hold:
(28) 750ml bottles at 41° to 64°F
(66) 12oz cans at 34° to 50°F

FEATURES

Zero clearance hinges for flush integration*
Secure door lock
Full extension shelves and racks
Library quiet 39 dBA operation
Elegant tri-color interior illumination
Intuitive digital touch controls
6-1/2' Power Cord with low profile 90° flat plug
Low E Glass blocks harmful UV light
Alarm Functions
Energy Saver and Sabbath Mode

* Note: zero clearance hinges are visible just above and below the door panel


SPECIFICATIONS

ELECTRICAL 120V 60HZ 4.35 AMP*

DIMENSIONS H 34 1/8"
W 29 7/8"
D 23 3/4" (w 3/4" finish panel)


ROUGH IN H 34 1/4" min
W 30"
D 24"

REFRIGERANT R600A



Scan the QR Code to see the installation video.


ROUGH IN DIMENSIONS

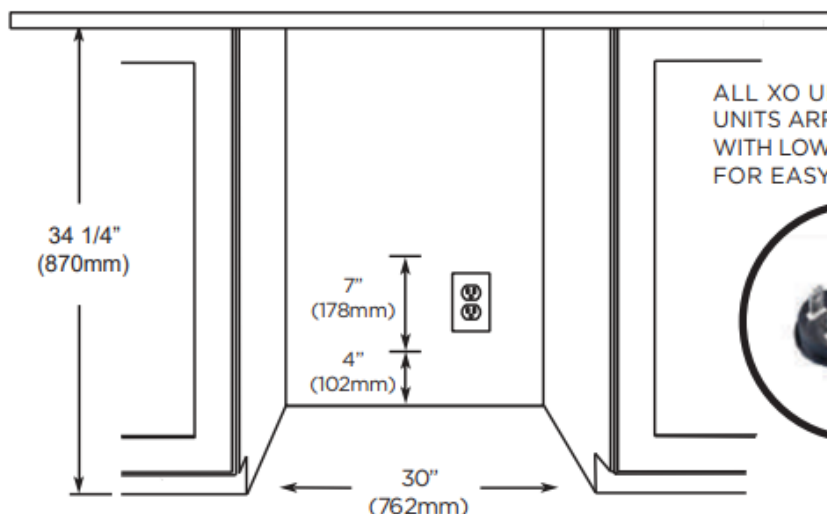



ALL XO UNDERCOUNTER
UNITS ARRIVE PRE-WIRED
WITH LOW PROFILE PLUGS
FOR EASY INSTALLATION



NEED MORE SPACE -
CUT INTO AN ADJOINING
CABINET TO REACH AN
OUTLET THERE




OVERLAY FRAME DIMENSIONS

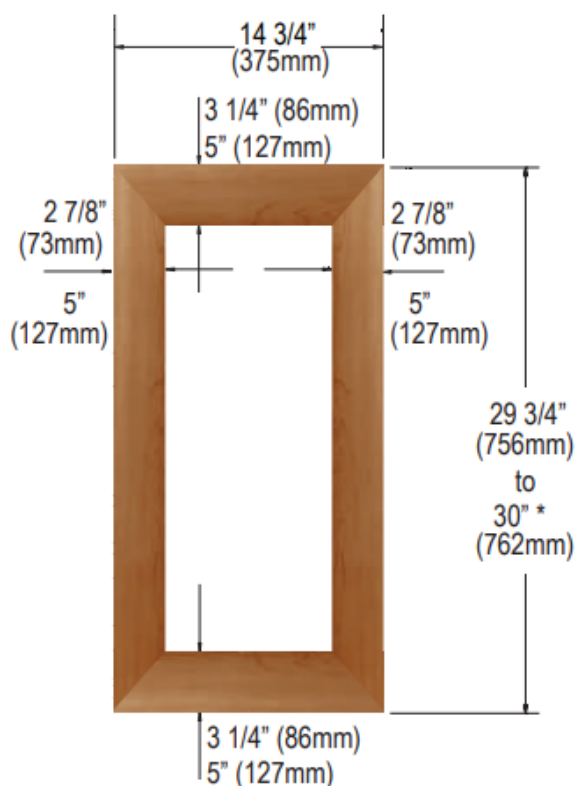

WHEN INSTALLING WITH
THE HINGE SIDE NEXT TO A WALL -


LEAVE ENOUGH CLEARANCE GAP
FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN
A MINIMUM OF 90°.



TO ACCOMMODATE THE HINGE PINS
ON THE HINGE SIDE OF THE PANEL
Drill a hole at least 5/16" in diameter and
1" deep into the top and bottom of the
frame in the location shown.

9/16" in from the edge and 7/16" out from
the unfinished side facing the door.

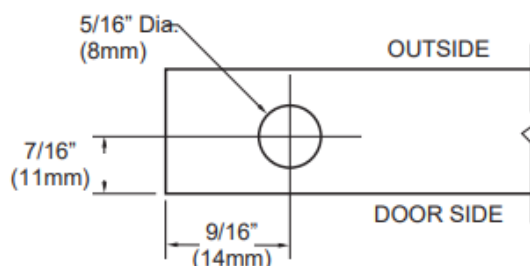

THE DOOR STOP IS SET AT 110°
BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY
YOU CANNOT EXTEND THE RACKS.