



XOJ_SC
WALL MOUNT HOOD

HOW BEAUTIFUL KITCHENS BREATHE



XOJ_SC

- High-Velocity Blower
- Incomparable handcrafted Italian finish
- 3 speed electronic illuminated controls
- 5 Minute Delay Function

DESIGNED AND CRAFTED IN ITALY


The XOJ is a sleek sophisticated design with flatter angles and clean edges. Designed and crafted in Italy it's the perfect choice for those seeking high performance with European styling.

At XO, we believe that a good design is something everyone can afford

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU



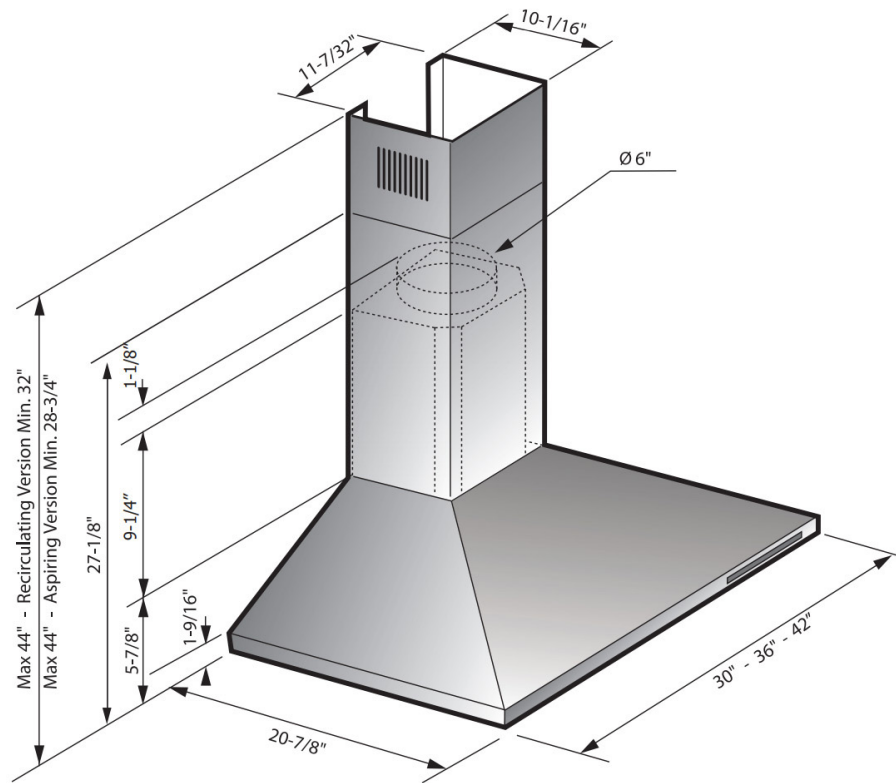

FEATURES

FINISH

Stainless Steel

FEATURES

- Electronic 3 Speed Control
- CCC Code Compliance Control - 395 or 600 CFM
- High Efficiency 3000k LED lights (x2)
- Stainless Steel PRO Baffle Filters
- Standard Chimney fits ceilings up to 9' tall
- 6" Vertical Duct or Recirculating (Kit Sold Separately)
(Recirculated air must be returned to the living space)
- 5 Minute Delay Shutoff Timer
- Made In Italy

PERFORMANCE

SPEED	1	2	CCC	3
CFM	160	250	395	600
SONES	1.0	2.5	4.0	6.5

SPECIFICATIONS

ELECTRICAL 115VAC 60HZ 4 AMP**DIMENSIONS**

H MAX 44" - MIN 32" (Recirc)
MIN 28 3/4" (Vented)

W 30", 36", 42"

D 20 7/8"

(Refer to illustration above)

MOUNTING HEIGHT

ABOVE COOKING 27" - 32"

DUCTING OPTIONS

6 inch duct required
Ductless Option for applications
where no ducting is available

OPTIONS

Recirculation Kit
Duct Cover Extension
(For ceilings up to 10' tall)

XORFK01
XOEDCJ



RECOMMENDED MOUNTING HEIGHT

All range hoods have a recommended range of installation height over the cooking surface. However cooking styles, types of cooking equipment and installation limitation can vary greatly. For installations outside the recommended range - consult XO.

THESE MODELS HAVE A 6" DIAMETER VERTICAL EXHAUST DUCT

RECIRCULATION

These XOJ models may be installed with an optional recirculation kit when venting outside is not practical. When used in recirculation mode the filtered exhaust is directed back into the living space through vents in the telescoping duct cover. These vents cannot be covered in the installation.

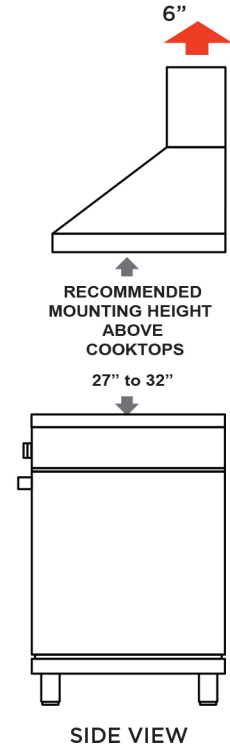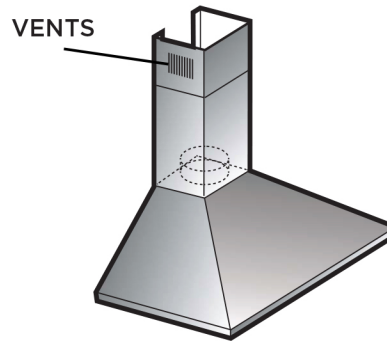

HOW DOES CODE COMPLIANCE CONTROL HELP -



CODE COMPLIANCE CONTROL (CCC) enables the installer to re-program the hood as it is being installed. **Your XO Hood is set to operate at 600 CFM maximum at the factory.**

Re-programming is accomplished quickly and requires no special tools or additional parts but once done, the air flow rate is limited to a maximum of 395 CFM below the 400 CFM cap that most local codes impose eliminating the need for additional controls.

If your application calls for a make-up air solution, XO gives you more choices.